

# Panel Board

**Product description:** It is specially produced for heat, sound and fire safety and sandwich panel manufacturing.

## Application areas

It is used in all industrial buildings, storage areas, and roof and facade panels for heat, sound and fire safety.

## Application principles


Since it is intended for the firms manufacturing sandwich roof and facade, it is produced depending on the details of the manufacturing companies.

Product Code	Density	Thickness	Size (mm)	In-Pack Pieces	m <sup>2</sup> / Package
TWPL9075	90	75	1200 x 2000	28	67.20
TWPL9080	90	80	1200 x 2000	28	67.20
TWPL9085	90	85	1200 x 2000	25	60.00
TWPL90100	90	100	1200 x 2000	22	52.80

- 120 kg/m<sup>3</sup> panel plate is produced.
- Plates in size of 1000 x 2000 mm are produced.

## Reminders on Loading, Unloading, Transport and Storage:

- ▶ It should be done in closed areas in rainy weather.
- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Before pulling with rope, hard cardboard with dimensions of 50x20 cm size should be placed under the rope.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ Loading and unloading should be done with the roof crane.
- ▶ Plates should be carefully transported to the application area by two persons.

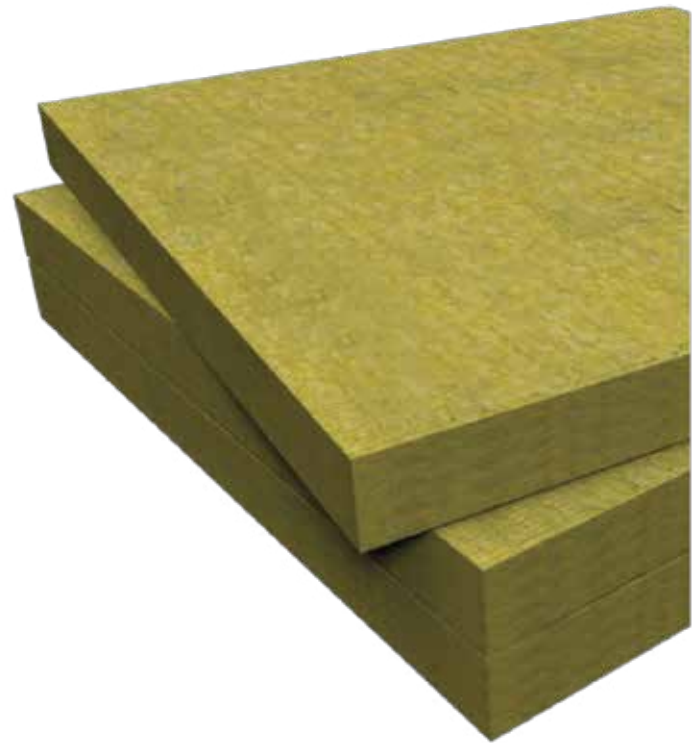

**terraWOOL**  
151 555 7430